

# Pikestuff

## Fire Station 541-0019

To help with the assembly here are some photos on the walls and roof.

The peaked walls make up the front and back walls. The cuts are different on each. On the front wall remove the top portion of the wall. (Fig 1) This removes the trim from the top and allows for the roof to continue on over the wall and form the overhang.

On the back wall remove the bottom portion of the wall. (Fig 2) This keeps the trim at the top and the roof will stop at the trim. The support is cut from the reinforcing strips and glued over the joint to help reinforce the joint.

The left and right side walls are made up from two 20 foot wall sections. (Fig 3) Remove the bottom portion of the walls and glue together as shown. The door openings are optional ( Up to 3 doors ) The support is cut from the reinforcing strips and glued over the joint to help reinforce the joint.

The roof assembly: Note on the back side of the larger roofs there is a small ridge. (Fig 4) Cut the roof to 3-3/8 by using the cut line shown. Next lay the roof pieces face down as shown in fig 5. Note the direction of each roof ridge (center piece) Face the short roof ridge so the longer tab is facing out. Glue together as shown in fig 6. The blue trim goes on last and will need to be trimmed to fit flush against the roof ridge. Also shave off some of the small ridge so that it's not in the way of the blue trim. The support is cut from the reinforcing strips and glued over the joint to help reinforce the joint.

Fig 1

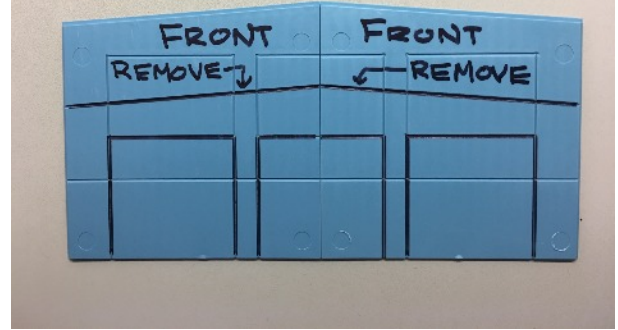


Fig 2



Fig 3



Fig 4

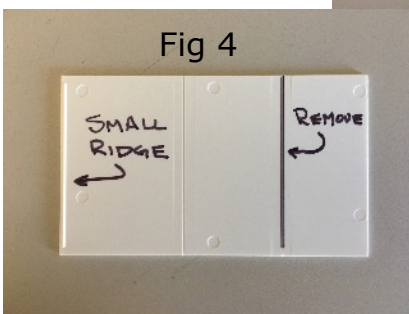


Fig 5

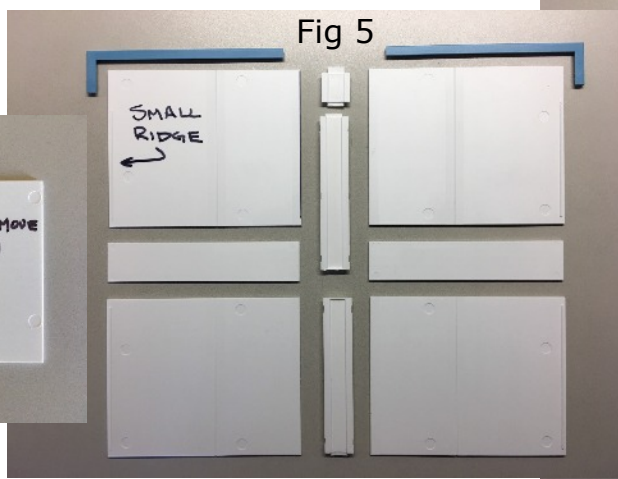


Fig 6

